


Fluorescent lampholders

26.620

G5 Push through lampholders




pkg. wt. part no.
1000 3 g **26.620.2001.50**

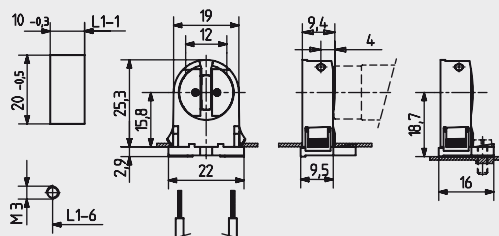


Lamp centre: 15.8 / 18.7 mm
Snap in / screw fixing foot
Housing: PC
Rotor: PBT
Approval: additional cULus (120W / 600V)
• For enclosed cut-outs: 10 x 20 mm
• A pair of lampholders provides a lamp length tolerance compensation of 2 mm

L1-1 / L1-6: Recommended dimension - The distance between the cut-outs and the tolerance should be governed by the dimensions of the respective lamps and luminaires.



pkg. wt. part no.
1000 3 g **26.620.2003.50**

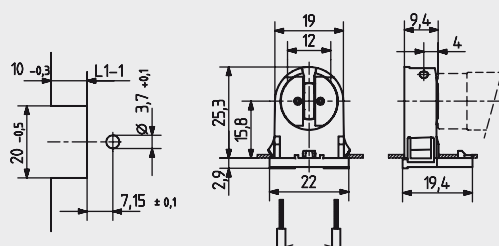


Lamp centre: 15.8 mm
Housing: PC
Rotor: PBT
Approval: additional cULus (120W / 600V)
• For cut-outs open at the rear: 10 x 20 mm
• A pair of lampholders provides a lamp length tolerance compensation of 2 mm

L1-1: Recommended dimension - The distance between the cut-outs and the tolerance should be governed by the dimensions of the respective lamps and luminaires.



pkg. wt. part no.
1000 3 g **26.620.2004.50**

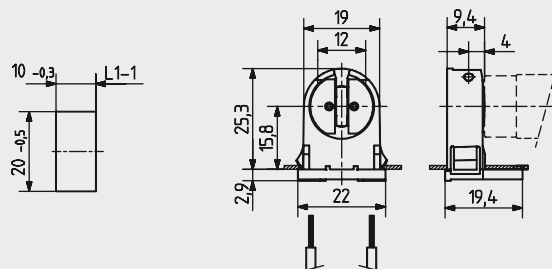

Lamp centre: 15.8 mm
Housing: PC
Rotor: PBT
Approval: additional cULus (120W / 600V)
• For enclosed cut-outs: 10 x 20 mm
• A pair of lampholders provides a lamp length tolerance compensation of 2 mm

L1-1: Recommended dimension - The distance between the cut-outs and the tolerance should be governed by the dimensions of the respective lamps and luminaires.

