

Hermético a líquido


Accesorios para conductos herméticos a líquidos

Conector hermético a líquido-90 Grados

Material estándar:

- Zinc fundido a presión

Catalogue Number	Size	Dimensions in(inches)				TPI (N1)	TPI (N2)	No.of Lock nuts Used	Desc. item
		A	B	C	D				
		±0.005	±0.005	±0.005	±0.005				
ALT-038I	3/8"	1.431	0.508	1.256	0.488	18	14	1	NO DISPONIBLE
ALT-050I	1/2"	1.409	0.508	1.283	0.565	18	14	1	CONECTOR CURVO 1/2" 90° ZINC CORAZA LIQU
ALT-075I	3/4"	1.606	0.512	1.527	0.747	18	14	1	CONECTOR CURVO 3/4" 90° ZINC CORAZA LIQU
ALT-100I	1"	1.976	0.650	1.772	0.949	18	11.5	1	CONECTOR CURVO 1" 90° ZINC CORAZA LIQUID
ALT-125I	1-1/4"	2.256	0.669	2.212	1.248	16	11.5	1	CONECTOR CURVO 1 1/4" 90° ZINC CORAZA LIQ
ALT-150I	1-1/2"	2.492	0.669	2.480	1.516	16	11.5	1	CONECTOR CURVO 1 1/2" 90° ZINC CORAZA LIQ
ALT-200I	2"	2.811	0.669	2.953	1.909	16	11.5	1	CONECTOR CURVO 2" 90° ZINC CORAZA LIQUID
ALT-250I	2-1/2"	4.259	0.945	3.543	2.402	14	8	1	NO DISPONIBLE
ALT-300I	3"	3.961	0.984	4.252	2.961	14	8	1	CONECTOR CURVO 3" 90° ZINC CORAZA LIQUID
ALT-400I	4"	4.134	1.102	5.236	3.799	14	8	1	CONECTOR CURVO 4" 90° ZINC CORAZA LIQUID

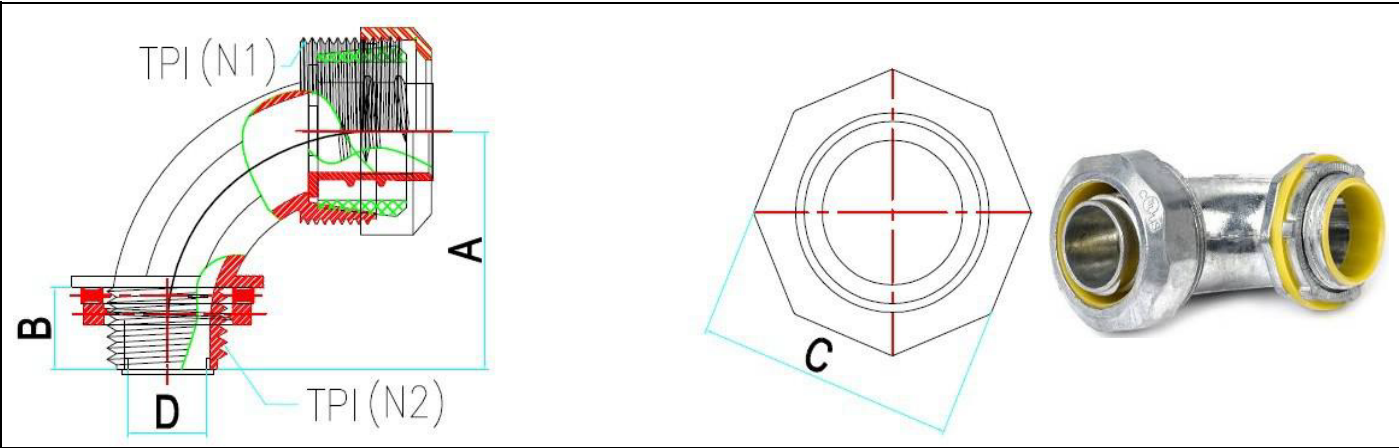

★ Consult Manufacturer for Proper Installation

USE: To terminate and seal liquidtight flexible metal conduit to an oiltight, liquidtight or rainlight box or enclosure. Connectors can be used with tapered thread female entry of unthreaded knockouts using the sealing washer and locknut provided.