

Hermético a líquido


Accesorios para conductos herméticos a líquidos

Conector hermético a líquido - Derecha


Material estándar:

- Zinc fundido a presión

Catalogue Number	Size	Dimensions in(inches)				TPI (N1)	TPI (N2)	No.of Lock nuts Used	Desc. item
		A	B	C	D				
		±0.005	±0.005	±0.005	±0.005				
SLT-038I	3/8"	1.201	0.481	1.256	0.488	14	18	1	NO DISPONIBLE
SLT-050I	1/2"	1.209	0.484	1.283	0.565	14	18	1	CONECTOR RECTO 1/2" 90° ZINC CORAZA LIQU
SLT-075I	3/4"	1.244	0.488	1.527	0.776	14	18	1	CONECTOR RECTO 3/4" 90° ZINC CORAZA LIQU
SLT-100I	1"	1.457	0.591	1.772	0.984	11.5	18	1	CONECTOR RECTO 1" 90° ZINC CORAZA LIQUID
SLT-125I	1-1/4"	1.725	0.669	2.213	1.260	11.5	16	1	CONECTOR RECTO 1 1/4" 90° ZINC CORAZA LIQ
SLT-150I	1-1/2"	1.756	0.669	2.480	1.528	11.5	16	1	CONECTOR RECTO 1 1/2" 90° ZINC CORAZA LIQ
SLT-200I	2"	1.732	0.630	2.953	1.941	11.5	16	1	CONECTOR RECTO 2" 90° ZINC CORAZA LIQUID
SLT-250I	2-1/2"	2.559	0.945	3.543	2.402	8	14	1	NO DISPONIBLE
SLT-300I	3"	2.795	0.984	4.252	2.961	8	14	1	CONECTOR RECTO 3" 90° ZINC CORAZA LIQUID
SLT-400I	4"	2.992	1.102	5.236	3.799	8	14	1	CONECTOR RECTO 4" 90° ZINC CORAZA LIQUID

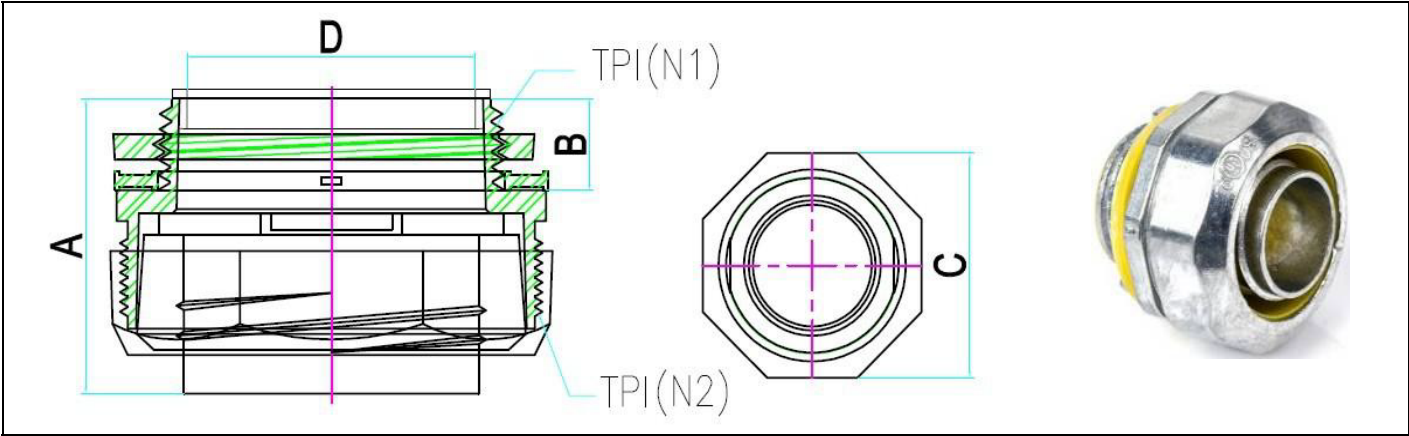

★ Consult Manufacturer for Proper Installation

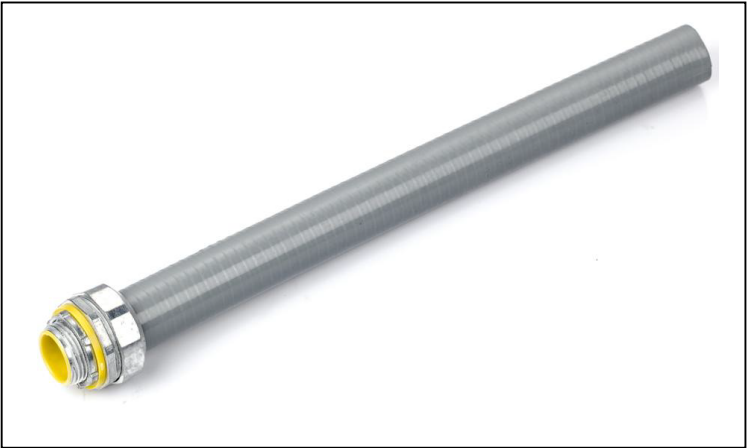

USE: To terminate and seal liquidtight flexible metal conduit to an oiltight, liquidtight or rainlight box or enclosure. Connectors can be used with tapered thread female entry of unthreaded knockouts using the sealing washer and locknut provided.